


Below Ground Riser Extensions PIP BG EXT

Below Ground

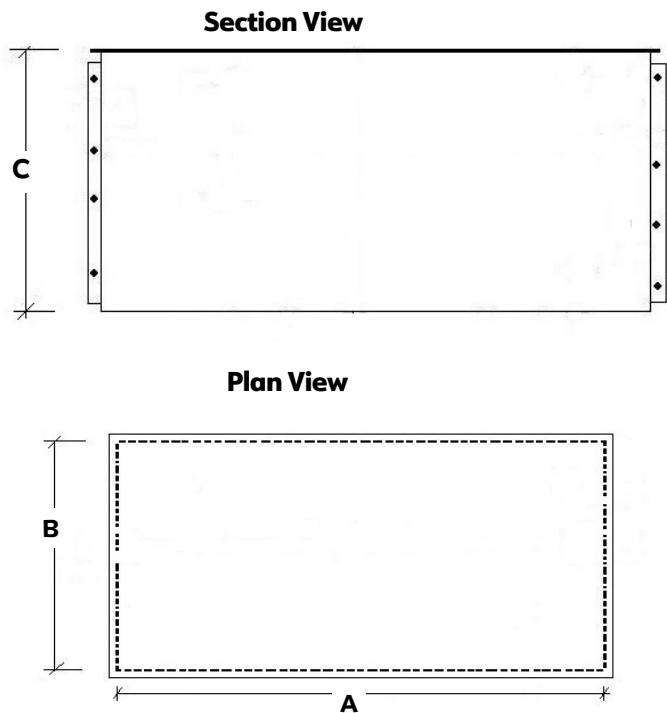

Capacity (Litres)	Internal Dimensions (mm)		
	A (Length)	B (Width)	C (Height)
250	900	600	470
300	900	600	560
400	900	600	750
600	1500	600	670
800	1500	600	900
1100	1500	600	1230
1500	2000	750	1000
2000	2500	750	1070
2500	1900	1200	1100
3000	2800	1200	900
3500	2800	1200	1050
4000	2800	1200	1200
4500	2800	1200	1340
5000	2800	1200	1490

Application & Features

Most commonly used to raise the height of an existing below ground tank.

- Designed for below ground installations.
- Manufactured from 6mm Polypropylene.
- Cast iron access covers capable of being removed by one person should be fitted (**available at additional cost**)
- Tanks must be surrounded with 100mm thick concrete walls.



Pioneer
Industrial
Plastics