


Above Ground

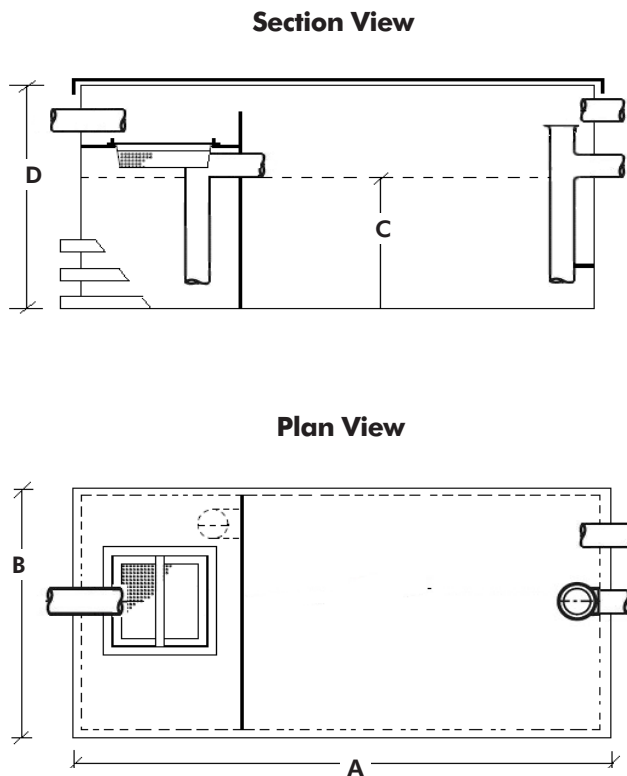

Capacity (Litres)	Internal Dimensions (mm)			
	A (Length)	B (Width)	C (Water Lv.)	D (Depth)
200	750	450	600	950
250	1180	500	450	800
300	1180	600	450	800
400	1180	600	600	950
600	1500	830	510	860
800	1500	830	680	1030
1000	1500	830	850	1200
1100	1500	830	930	1280
1500	1500	830	1270	1620
2000	2000	950	1060	1360
2500	2950	950	900	1240
3000	2950	950	1080	1430
3500	2950	1450	830	1180
4000	2950	1450	950	1300
4500	2950	1450	1070	1420
5000	2950	1450	1190	1540

Application & Features

Commonly used by commercial laundries, hospitals. Lint and other matter collected in straining basket, whilst second chamber cools water down prior to entering water authority drain.

- Designed for above ground installations.
- Manufactured from 6mm Polypropylene.
- Factory fitted with inlet/outlet/vent connections standard
- Standard fittings supplied with tank-
 - Removable straining basket
 - Removable air tight covers supplied with all tanks**(Loose fitting lids not acceptable due to odors created by waste water)**
- All capacity tanks have external bracing fitted for strength & support. Add an additional 100mm to the length and width dimensions for the approximate size when steel rails are fitted.
- When space limitations apply, equivalent capacity tanks can be manufactured to order.
- Inlet, outlet and vent positions can be altered to suit clients specific needs.

