


## Below Ground

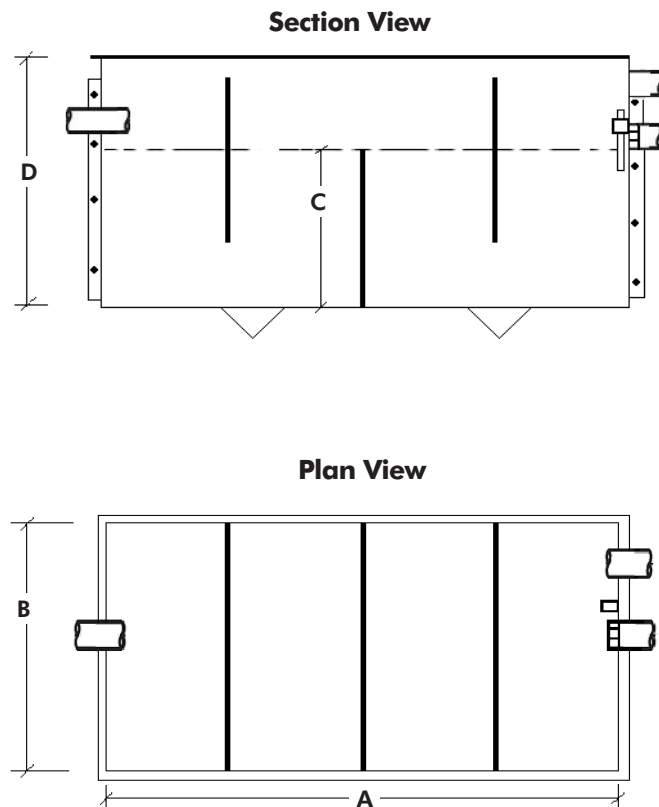

| Capacity<br>(Litres) | Internal Dimensions (mm) |              |                  |              |
|----------------------|--------------------------|--------------|------------------|--------------|
|                      | A<br>(Length)            | B<br>(Width) | C<br>(Water Lv.) | D<br>(Depth) |
| 250                  | 900                      | 600          | 470              | 770          |
| 300                  | 900                      | 600          | 560              | 860          |
| 400                  | 900                      | 600          | 750              | 1050         |
| 600                  | 1500                     | 600          | 670              | 970          |
| 800                  | 1500                     | 600          | 900              | 1200         |
| 1100                 | 1500                     | 600          | 1230             | 1530         |
| 1500                 | 2000                     | 750          | 1000             | 1300         |
| 2000                 | 2500                     | 750          | 1070             | 1370         |
| 2500                 | 1900                     | 1200         | 1100             | 1400         |
| 3000                 | 2800                     | 1200         | 900              | 1200         |
| 3500                 | 2800                     | 1200         | 1050             | 1350         |
| 4000                 | 2800                     | 1200         | 1200             | 1500         |
| 4500                 | 2800                     | 1200         | 1340             | 1640         |
| 5000                 | 2800                     | 1200         | 1490             | 1790         |

## Application & Features

Commonly used by small laboratories and schools. Trade waste passes through three baffles and marble chips to neutralize the PH before entering water authority drain.

- Designed for below ground installations.
- Manufactured from 6mm Polypropylene.
- Factory fitted with 100mm inlet/outlet/vent connections standard.
- Standard fittings supplied with tank-
  - 3 equally spaced baffles
  - bracket only for Test Block
- Cement mortar test block to be supplied & fitted by Trade Waste Inspector.
- When space limitations apply, equivalent capacity tanks can be manufactured to order.
- **Marble chips available at additional cost.**
- Cast iron access covers capable of being removed by one person should be fitted (available at additional cost)
- Inlet, outlet and vent positions can be altered to suit clients specific needs.
- Tanks must be surrounded with 100mm thick concrete walls & base.

